

DAFTAR PUSTAKA

- Ansoni, Fadloli Ghalib. 2014. “Perbandingan QoS VPN Protokol PPTP dan L2TP Untuk Layanan Video Streaming”
- Aldo Alifanto Maulana. 2015. “Rancang Bangun File Sharing *Server* menggunakan *Raspberry Pi* pada Jaringan VPN”
- Fikri Zainun Nasihin, Arif Bijaksana Putra Negara, Azhar Irwansyah. 2016. “Studi Perbandingan Performa QoS (*Quality of Service*) *Tunneling Protocol* PPTP dan L2TP pada Jaringan VPN menggunakan Mikrotik”
- I. Iskandar. 2015. “Analisa *Quality of Service* (QoS) Jaringan Internet Kampus (Studi Kasus: UIN Suska Riau)”
- I. Nugroho, B. Widada and Kustanto. 2015. “Perbandingan Performansi VPN dengan metode *Internet Protocol Security*”
- Kaseger Arthur Farly. 2017. “Perancangan dan Implementasi VPN *Server* dengan menggunakan Protokol SSTP (Secure Socket Tunneling Protocol) Studi Kasus Kampus Universitas Sam Ratulangi”
- Kustanto, Daniel T Saputro. 2015. “Belajar Jaringan Komputer berbasis Mikrotik OS”

Rudol. 2017. “Implementasi Keamanan Jaringan Komputer pada VPN menggunakan IPSec”

Ryan, Nathan Gusti. 2012. “Membangun VPN *Server* dan *Client* dengan Mikrotik”

Sahni, Lukman. 2012. “Perancangan, Implementasi dan Analisa Perbandingan L2TP/IPSec VPN dengan OpenVPN pada Mikrotik Router”

Sridevi, “L2TP/IPSec *Interworking*”, IJSR-International Journal Of Scientific Research, Volume 2, Issue 8, 2013.

Supendar, Hendra. 2016. “Implementasi *Remote Site* pada VPN Berbasis Mikrotik”

LAMPIRAN

Konfigurasi SSTP

1. SSTP Server

The image contains two screenshots of the MikroTik Winbox interface, specifically the PPP and Address List windows.

PPP Window:

Name	Type	Actual MTU	L2 MTU	Tx	Rx	Tx Packet (p/s)	Rx Packet (p/s)
DR <=> <sstp-user1>	SSTP Server Binding	1500		0 bps	0 bps	0	0

Address List Window:

	Address	Network	Interface
	10.10.10.1/24	10.10.10.0	ether2
D	10.10.30.1	10.10.30.2	<sstp-user1>
	192.168.70.2/24	192.168.70.0	ether1

Route List

	Dst. Address	Gateway	Distance	Routing Mark
DAC	▶ 192.168.70.0/...	ether1 reachable	0	
DAC	▶ 10.10.30.2	<sstp-user1> reachable	0	
XS	▶ 10.10.20.2	10.10.30.2	1	
AS	▶ 10.10.20.2	10.10.30.2 reachable <sstp-user1>	1	
DAC	▶ 10.10.10.0/24	ether2 reachable	0	

5 items

2. SSTP Client

PPP

	Name	Type	Actual MTU	L2 MTU	Tx	Rx	Tx Pack
X	↳ l2p-server	L2TP Client			0 bps	0 bps	
R	↳ sstp-server	SSTP Client	1500		2.2 kbps	0 bps	

2 items out of 4 (1 selected)

Address List

Address List

	Address	Network	Interface	
	10.10.20.1/24	10.10.20.0	ether2	
D	10.10.30.2	10.10.30.1	stp-server	
	192.168.70.3/24	192.168.70.0	ether1	

Find

3 items

Route List

Route List

Routes

	Dst. Address	Gateway	Distance	Route Type
XS	10.10.10.2	10.10.30.1	1	
AS	10.10.10.2	10.10.30.1 reachable sstp-server	1	
DAC	10.10.20.0/24	ether2 reachable	0	
DAC	10.10.30.1	stp-server reachable	0	
DAC	192.168.70.0/24	ether1 reachable	0	

Find all

5 items

Konfigurasi L2TP/IPSec

1. L2TP/IPSec Server

The image displays two windows from the WinBox interface, illustrating the configuration of an L2TP/IPSec server.

PPP Window:

Name	Type	Actual MTU	L2 MTU	Tx	Rx
DR <=> <l2tp-user1>	L2TP Server Binding	1450		0 bps	0 bps

Address List Window:

Address	Network	Interface
10.10.10.1/24	10.10.10.0	ether2
10.10.30.1	10.10.30.2	<l2tp-user1>
192.168.70.2/24	192.168.70.0	ether1

Route List

	Dst. Address	Gateway	Distance	Routing Mark
DAC	▶ 192.168.70.0/...	ether1 reachable	0	
DAC	▶ 10.10.30.2	<2tp-user1> reachable	0	
XS	▶ 10.10.20.2	10.10.30.2	1	
AS	▶ 10.10.20.2	10.10.30.2 reachable <2tp-user1>	1	
DAC	▶ 10.10.10.0/24	ether2 reachable	0	

5 items

2. L2TP/IPSec Client

PPP

Interface	PPPoE Servers	Secrets	Profiles	Active Connections	L2TP Secrets		
R ◀> l2tp-server	PPPoE Scanner	PPTP Server	SSTP Server	L2TP Server	OVPN Server	PPPoE Scan	
X ◀> sstp-server							
	Name	Type	Actual MTU	L2 MTU	Tx	Rx	Tx Pack
					0 bps	0 bps	
					0 bps	0 bps	

Address List

Address Network Interface

10.10.20.1/24	10.10.20.0	ether2
D 10.10.30.2	10.10.30.1	l2tp-server
192.168.70.3/24	192.168.70.0	ether1

3 items


Route List

	Dst. Address	Gateway	Distance	Ro
XS	▶ 10.10.10.2	10.10.30.1	1	
AS	▶ 10.10.10.2	10.10.30.1 reachable l2tp-server	1	
DAC	▶ 10.10.20.0/24	ether2 reachable	0	
DAC	▶ 10.10.30.1	l2tp-server reachable	0	
DAC	▶ 192.168.70.0/24	ether1 reachable	0	


5 items

Dokumentasi

1. PC Server

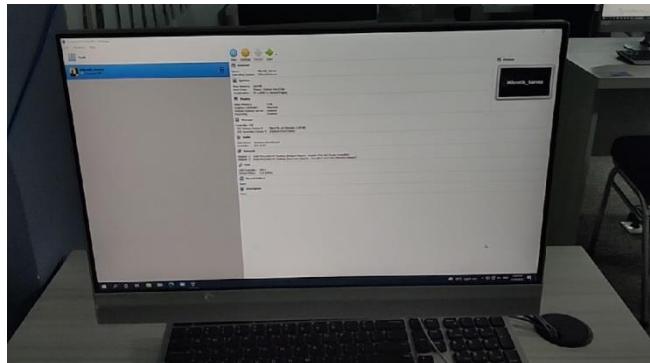

2. PC Client

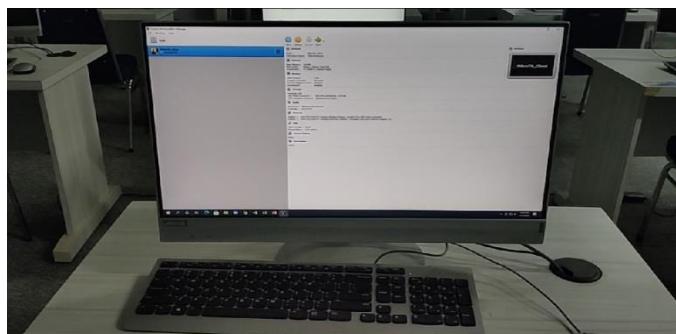

3. PC Analyzer

