


DAFTAR PUSTAKA


- Asghar, M. S. (2011). Power Electronics. New Delhi: PHI Learning .
- Atmel. (2016). 8-Bit AVR Microcontrollers : ATMega328P Datasheet Complete. California: Atmel Press.
- Chapman, S. J. (2012). *Electric Machinery Fundamentals*. New York: The McGraw-Hill Companies.
- Dewi, K. (2016). Implementasi Zero Crossing pada Kontrol Unit untuk Pengaturan Iluminasi Lampu Pijar dan Kipas Angin Berbasis Nuvoton. *Prosiding Seminar Teknik Elektro & Informatika*. PNUP, Makassar.
- Gowda, Y., Hema, G., Prasad, S., & Vilasitha, V. (2016). Performance and Speed Control Cycloconverter Fed Split Phase Induction Motor. *Internasional Research Journal of Engineering and Technology (IRJET)*, 3(9), 1142-1146.
- Gupta, A., Thakur, R., & Murarka, S. (2013). An Efficient Approach to Zero Crossing Detection Based On Opto-Coupler. *Int. Journal of Engineering Research and Applications*, 3(5), 834-838.
- Kavitha, R. Premalatha, & K., R. (2019). Harmonic Research in Direct AC-AC Variable Frequency Power Converter. *International Journal of Recent Technology and Engineering (IJRTE)*, 8(2S8), 1686-1690.
- Lazim, M. T. (2019). *Power Electronics and Drives*. Jordan: Philadelphia University.
- Lou, F. L., & Ye, H. (2018). *Power Electronics Advanced Conversion Technologies*. Florida : CRC Press.
- NXP Semiconductors. (2009). Product Datasheet : BT151-650R. Eindhoven.
- Nyein, A. (2018). Analysis of Cycloconverter Fed Induction Motor Drive. *Internasional Jurnal of Trend in Scientific Research and Development (IJTSRD)*, 3(1), 569-574.
- Permana, H., Azhar, & Finawan, A. (2021). Rancang Bangun Cycloconverter 1,5kW untuk Pengendalian Kecepatan Putar Motor Induksi 1 Phasa 500-1000 RPM pada Mesin Pengupas Pinang. *Jurnal TEKTRONIKA*, 5(1), 8-14.
- Rashid, M. H. (2011). *Microelectronic Circuits Analysis and Design Second Edition*. Florida: Cengage Learning.
- Sen, P. C. (2014). *Principles of Electric Machines and Power Electronics*. Ontario: John Wiley and Sons, Inc.


- Setiyono, B. D. (2021). Performance Comparison Modelling Between Single-Phase Cycloconverters and Three-Phase Cycloconverters Using Matlab Simulink Tools. *Jurnal Ilmiah Teknik Elektro Komputer dan Informatika (JITEKI)*, 7(2), 217-229.
- Sharma, S. S. (2008). *Power Electronics*. New Delhi: Laxmi Publications.
- Shepherd, W., & Zhang, L. (2004). *Power Converter Circuits*. New York: Marcel Dekker, Inc.
- Singh, M. D., & Khanchandani, K. B. (2007). *Power Electronics Second Edition*. New Delhi: Tata McGraw-Hill Publishing Company.

LAMPIRAN

Lampiran I. Dokumentasi Pengujian Alat

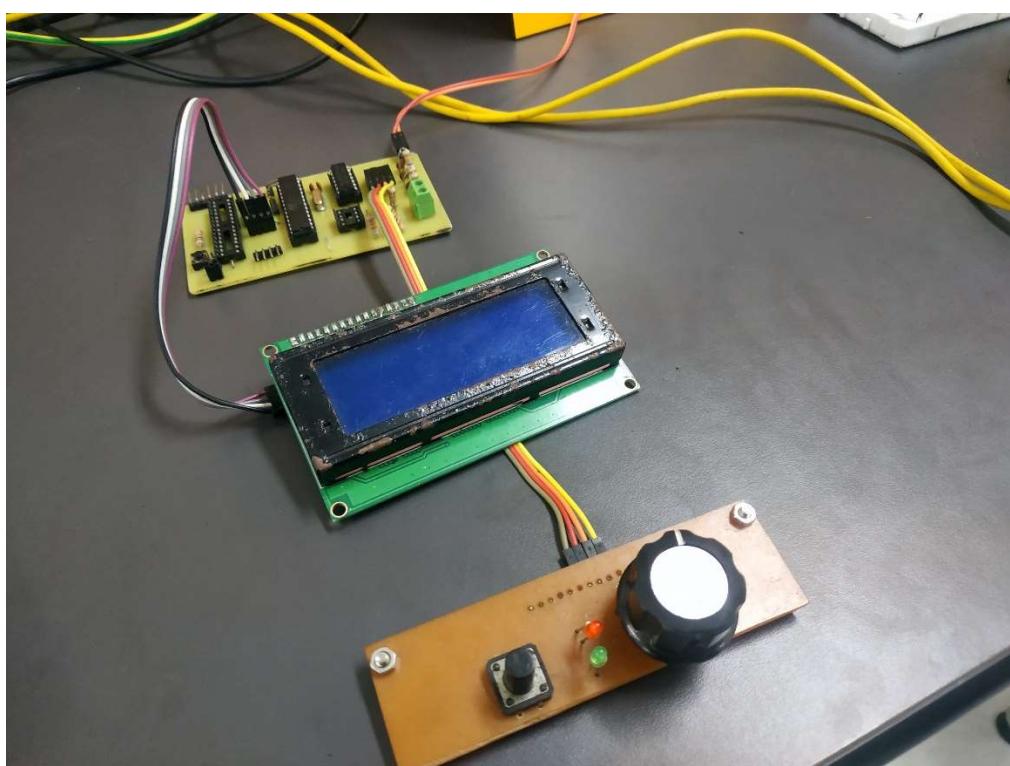

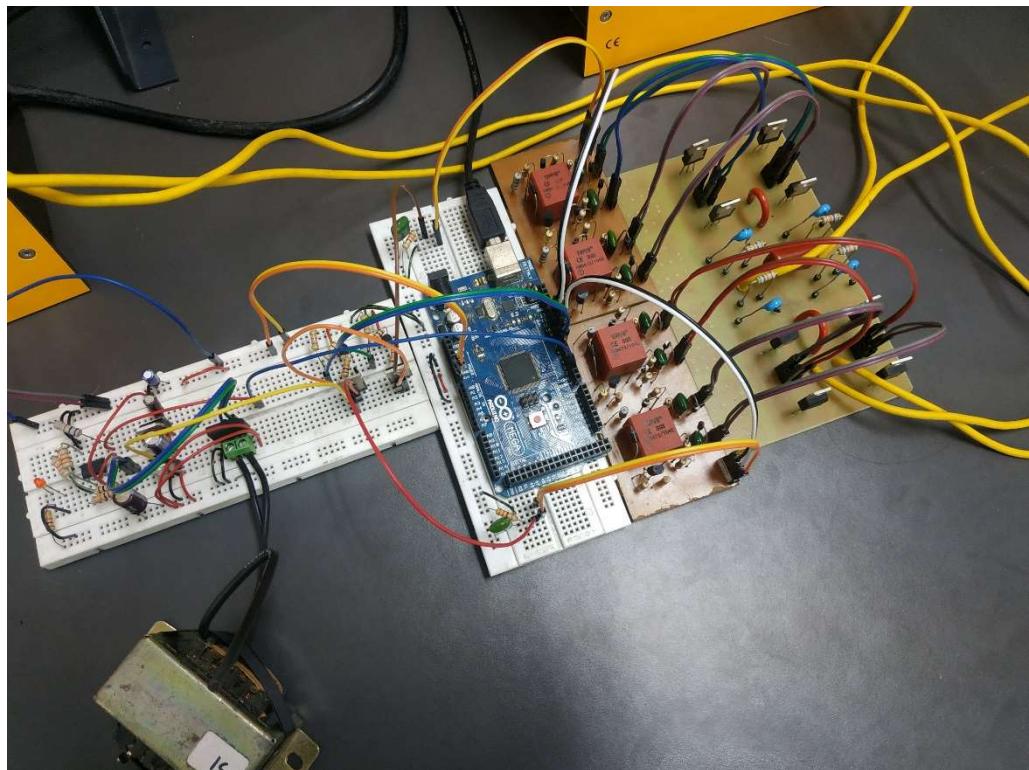

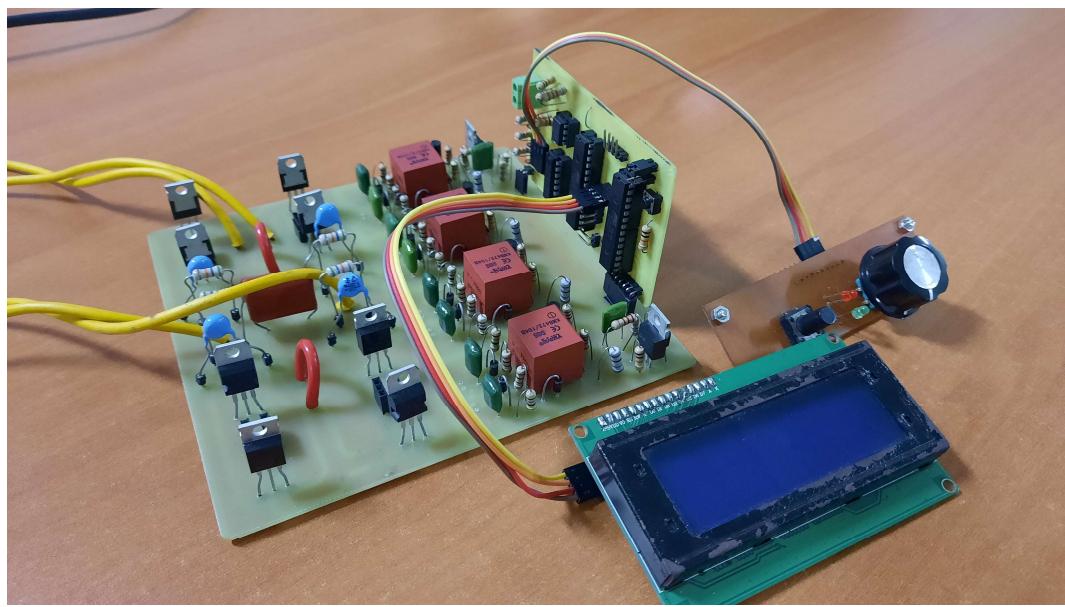

Lampiran II. Listing kode pemrograman mikrokontroler ATMega328P

- ATMega328P I :

```
#include <LiquidCrystal_I2C.h>
```

```
#define on_off 9
```

```
#define sw_Pin 5
```

```
#define clk_Pin 3
```

```
#define dt_Pin 4
```

```
LiquidCrystal_I2C lcd(0x27, 20, 4);
```

```
volatile int step_pos = 0;
```

```
volatile int pos;
```

```
static int pos_lama = 0;
```

```
volatile byte sw = 0;
```

```
volatile int counter = 0;
```

```
int counter_lama = 1;
```

```
int pengulang;
```

```
int sisa;
```

```
int batas_ss;
```

```
bool set_timer;
```

```
bool set_off = false;
```

```
bool flag_timer = false;
```

```
bool off_state = false;
```

```
bool latch_menu = false;
```

```
byte menu = 0;
```

```
static int menu_lama = 1;
```

```
byte batas_menu;
```

```
int n_mode = 0;
```

```
byte n_pngtrn = 0;
```

```
int n_pilihan = 0;
```

```
byte z;
```

```

volatile byte freq;
byte freq_lama = 0;
byte freq_set = 5;

byte durasi;
float durasi_ss;
byte durasi_set = 15;

byte alpha = 135;
byte alpha_set = 90;
String s_alpha;
byte n_char_alpha;
byte sym_derajat = B11011111;

byte fr;
byte fr_set;
byte fr_lama = 0;
int delta_freq;

uint8_t dt_Freq;
uint8_t dt_Fr;
uint8_t dt_Alpha[3];
byte n_Alpha[3];

String mode[] = {"Manual", "Softstart/stop"};
String kond_mtr[] = {"Stop", "Running"};
String op_mtr[] = {"Hidupkan Motor", "Matikan Motor"};
String pngtrn[][5] = {{"", "Ubah Frekuensi", "Ubah Sudut Picu", "Ubah Mode", "Matikan Alat"},
                     {"", "Ubah D S.startstop", "Ubah Sudut Picu", "Ubah Mode", "Matikan Alat"}
};

void setup()
{
  Serial.begin(9600);

  lcd.init();
  lcd.clear();
  lcd.backlight();
}

```

```

pinMode(on_off, OUTPUT);
pinMode(clk_Pin, INPUT);
pinMode(dt_Pin, INPUT);
pinMode(sw_Pin, INPUT_PULLUP);

digitalWrite(on_off, LOW);

noInterrupts();
PCICR |= (1 << PCIE2);
PCMCK2 |= (1 << PCINT21);

TCCR1A = 0;
TCCR1B = 0;
TCNT1 = 0;
OCR1A = 15625;
TCCR1B |= (1 << CS12) | (1 << CS10); //prescaler 1024
interrupts();

attachInterrupt(digitalPinToInterrupt(clk_Pin), r_encoder, CHANGE);
}

ISR (PCINT2_vect)
{
if(!digitalRead(sw_Pin) && !latch_menu)
{
sw++;
step_pos = 0;
pos = 0;

if (menu == 4 && sw == 5)
{
switch (n_pngtrn)
{
case 0: // matikan/hidupkan motor
fr_set = (fr_set + 1) % 2;
menu = 3;
break;
}
}
}

```

```

case 1: // ubah freq/durasi ss
    menu = 1;
    break;

case 2: // ubah sudut picu
    menu = 2;
    break;

case 3: // pilih mode
    freq_set = freq;
    menu = 0;
    break;

case 4: // matikan sistem
    fr_set = 0;
    set_off = true;
    menu = 5;
    break;
}

sw = menu;
n_pngtrn = 0;
n_pilihan = 0;
z = 0;
}

else
{
    menu = sw;
}
}

void r_encoder()
{
if(digitalRead(clk_Pin) != digitalRead(dt_Pin))
{
    step_pos++;
}
else
{

```

```

    step_pos--;
}

if(step_pos >= 2)
{
    pos++;
    step_pos = 0;
}
if(step_pos <= -2)
{
    pos--;
    step_pos = 0;
}
}

ISR (TIMER1_COMPA_vect) //ISR untuk softstart/stop
{
if(OCR1B == 0 && counter == pengulang && !flag_timer)
{
    freq = freq + (delta_freq);
    counter = 0;
}
else
{
    counter++;
    TCNT1 = 0;
}
}

ISR (TIMER1_COMPB_vect)
{
if(counter == pengulang && !flag_timer)
{
    freq = freq + (delta_freq);
    counter = 0;
    TCNT1 = 0;
}
}

void loop()

```

```

{
    if(menu_lama != menu || (pos_lama != pos && menu != 3) || freq != freq_lama || (counter != counter_lama
    && flag_timer))
    {
        if(menu_lama != menu)
        {
            lcd.clear();
        }

        switch (menu)
        {
            case 0:
                fr_set = 1;
                pilih_Mode();
                break;

            case 1:
                if(n_mode == 0)
                {
                    atur_Freq();
                }
                else
                {
                    atur_Time_ss();
                }
                break;

            case 2:
                atur_Alpha();
                break;

            case 3:
                operate_Motor();
                kirim_Data();
                monitoring();
                break;

            case 4:
                pengaturan();
        }
    }
}

```

```

break;

case 5:
    matikan_Motor();
    kirim_Data();
    matikan_Sys();
    break;
}

menu_lama = menu;
pos_lama = pos;
freq_lama = freq;
counter_lama = counter;
}

}

int encoder(int var, int b_bawah, int b_atas)
{
    noInterrupts();
    var = var + pos;
    pos = 0;
    interrupts();
    var = constrain(var, b_bawah, b_atas);
    return var;
}

void operate_Motor()
{
    alpha = alpha_set;

    if(n_mode == 0)
    {
        freq = freq_set;
        fr_lama = fr_set;
        fr = fr_set;
    }

    else if (n_mode == 1)
    {
        durasi = durasi_set;
    }
}

```

```

durasi_ss = durasi_set;
if (fr_set != fr_lama)
{
    latch_menu = true;

    if (fr_set == 1)
    {
        fr = 1;
        freq = 5;
        delta_freq = -1;
        batas_ss = 1;
    }
    else if (fr_set == 0)
    {
        freq += 1;
        delta_freq = 1;
        batas_ss = 5 + 1;
    }

    freq_set = freq;
    pengulang = durasi_ss / abs(batas_ss - freq_set);
    OCR1B = ((durasi_ss / (abs(batas_ss - freq_set))) - pengulang) * 15625 ;
    set_timer = 1;
    fr_lama = fr_set;
}

if (freq == batas_ss)
{
    TIMSK1 &= (0 << OCIE1A) | (0 << OCIE1B);
    latch_menu = false;
    if (freq > 5)
    {
        freq = 5;
        fr = 0;
    }
}
}
}
}

```

```

void matikan_Motor()
{
    while (set_off)
    {
        if (fr_lama == 1 && n_mode == 1)
        {
            freq += 1;
            delta_freq = 1;
            batas_ss = 5 + 1;
            freq_set = freq;
            pengulang = durasi_ss / abs(batas_ss - freq_set);
            OCR1B = ((durasi_ss / (abs(batas_ss - freq_set))) - pengulang) * 15625 ;
        }
        else
        {
            if (fr_lama == 1 && n_mode == 0)
            {
                freq = 5;
            }
            pengulang = 3;
            OCR1B = 0;
            batas_ss = 4;
            flag_timer = true;
        }
        set_timer = 1;
        set_off = false;
    }

    if (freq == batas_ss && !flag_timer)
    {
        TIMSK1 &= (0 << OCIE1A) | (0 << OCIE1B);
        if (freq > 5)
        {
            freq = 5;
            fr = 0;
            off_state = true;
        }
    }
    else if (counter == batas_ss && flag_timer)
}

```

```

{
  TIMSK1 &= (0 << OCIE1A) | (0 << OCIE1B);
  fr = 0;
  off_state = true;
}
}

void kirim_Data()
{
  dt_Freq = freq + '0';
  dt_Fr = fr + '0';
  n_Alpha[2] = alpha;

  Serial.write('#');
  Serial.write(dt_Freq);
  Serial.write('#');
  Serial.write(dt_Fr);
  Serial.write('#');
  for (int n = 2; n > -1; n--)
  {
    byte bagi = pow(10,n);
    dt_Alpha[n] = ((n_Alpha[n]/bagi)) + '0';

    if (n > 0)
    {
      n_Alpha[n-1] = n_Alpha[n]%bagi;
    }

    Serial.write(dt_Alpha[n]);
  }
  Serial.write('@');
}

void pilih_Mode()
{
  n_mode = encoder(n_mode, 0, 1);

  lcd.setCursor(0, 0);
  lcd.print("Pilih Mode :");
}

```

```

lcd.setCursor(2, 1);
lcd.print(mode[0]);
lcd.setCursor(2, 2);
lcd.print(mode[1]);

lcd.setCursor(0, 1);
lcd.print(" "); //clear kolom

lcd.setCursor(0, 2);
lcd.print(" ");
lcd.setCursor(0, (n_mode + 1));
lcd.print(">");
}

void atur_Freq()
{
freq_set = encoder(freq_set, 1, 5);

lcd.setCursor(0, 0);
lcd.print("Atur Frekuensi");
lcd.setCursor(0, 1);
lcd.print("Kerja :");
lcd.setCursor(9, 3);
lcd.print("F/");

lcd.setCursor(11, 3);
lcd.print(" "); //clear kolom

lcd.setCursor(11, 3);
lcd.print(freq_set);
}

void atur_Time_ss()
{
durasi_set = encoder(durasi_set, 10, 20);

lcd.setCursor(0, 0);
lcd.print("Atur Durasi");
lcd.setCursor(0, 1);

```

```

lcd.print("Softstart/stop :");

lcd.setCursor(6, 3);
lcd.print(" "); //clear kolom
lcd.setCursor(6, 3);
lcd.print(durasi_set);
lcd.setCursor(9, 3);
lcd.print("detik");
}

void atur_Alpha()
{
alpha_set = encoder(alpha_set, 10, 170);

s_alpha = String (alpha_set);
n_char_alpha = s_alpha.length();

lcd.setCursor(0, 0);
lcd.print("Atur Sudut Picu :");

lcd.setCursor(8,3);
lcd.print(" ");
lcd.setCursor((11-n_char_alpha), 3);
lcd.print(alpha_set);
lcd.setCursor(11, 3);
lcd.write(sym_derajat);
}

void monitoring()
{
lcd.setCursor(0, 0);
lcd.print("----MONITORING----");

lcd.setCursor(0, 1);
lcd.print("MODE :");
lcd.setCursor(6, 1);
lcd.print(mode[n_mode]);

lcd.setCursor(0, 2);

```

```

lcd.print("FREQ :");
lcd.setCursor(6, 2);
lcd.print("F/");
lcd.setCursor(8, 2);
lcd.print(" "); //clear kolom
lcd.setCursor(8, 2);
lcd.print(freq);

lcd.setCursor((14-n_char_alpha), 2);
lcd.print(alpha);
lcd.setCursor(14, 2);
lcd.write(sym_derajat);

lcd.setCursor(0, 3);
lcd.print("MOTOR:");
lcd.setCursor(6, 3);
lcd.print("    ");
lcd.setCursor(6, 3);
lcd.print(kond_mtr[fr]);

if (n_mode == 1)
{
    lcd.setCursor((17), 2);
    lcd.print(durasi);
    lcd.setCursor(19, 2);
    lcd.print("s");

    if (set_timer)
    {
        set_timer = 0;
        noInterrupts();
        TIMSK1 |= (1 << OCIE1A) | (1 << OCIE1B);
        counter = -1;
        interrupts();
    }
}

void pengaturan()

```

```

{
for (int x = 0; x < 2; x++)
{
pngtrn[x][0] = op_mtr[fr];
}

n_pilihan = encoder(n_pilihan, -1, 4);

if (n_pilihan > 3)
{
if (z == 0)
{
lcd.clear();
}
z = 1;
n_pilihan = 3;
}
else if (n_pilihan < 0 )
{
if (z == 1)
{
lcd.clear();
}
z = 0;
n_pilihan = 0;
}

for (int y = 0; y <= 3; y++)
{
lcd.setCursor(2, y);
lcd.print(pngtrn[n_mode][(y+z)]);
lcd.setCursor(0, y);
lcd.print(" "); //clear kolom
}
lcd.setCursor(0, n_pilihan);
lcd.print(">");

n_pngtrn = n_pilihan + z;
lcd.setCursor(19, 3);

```

```

lcd.print(n_pngtrn);
}

void matikan_Sys()
{
    lcd.setCursor(6, 1);
    lcd.print("Mematikan");
    lcd.setCursor(7, 2);
    lcd.print("Sistem");

    if(set_timer)
    {
        set_timer = 0;
        noInterrupts();
        TIMSK1 |= (1 << OCIE1A) | (1 << OCIE1B);
        interrupts();
        counter = -1;
    }

    if(off_state)
    {
        digitalWrite(on_off, HIGH);
    }
}

● ATMega328P II :

#define ZCD_Pin 2

const int scr_Pin[][2] = { {12, 11}, {10, 9} };
const int conv_Pin[2] = {8, 7};

volatile byte freq = 5; //frekuensi output f/5 - f/1
volatile bool fr = false; //set untuk firing atau tidak
volatile uint16_t alpha = 1500; //range 0 - 2500 (0 - 180)
uint16_t cal = 20; // kalibrasi utk ZCD yang leading

byte ZCD_Cycle; // siklus dari P/N dari sinyal ZCD
byte freq_Cycle = 0; // jumlah siklus P/N dari sinyal keluaran
bool conv_Type = 0; // jenis converter yang aktif (Conv P / N)

```

```

String data;
char dt_Char;
int dt_Freq; // data-data yang diterima dari arduino #1
bool dt_Fr;
int dt_Alpha;
int arr_dt_Alpha[3];

void setup()
{
    Serial.begin(9600);

    for (int i = 0; i < 2; i++)
    {
        for (int j = 0; j < 2; j++)
        {
            pinMode(scr_Pin[i][j], OUTPUT);
            digitalWrite(scr_Pin[i][j], LOW);
        }
    }

    for (int i = 0; i < 2; i++)
    {
        pinMode(conv_Pin[i], OUTPUT);
        digitalWrite(conv_Pin[i], LOW);
    }

    dt_Freq = freq;
    dt_Fr = fr;
    dt_Alpha = alpha;

    noInterrupts();
    TCCR1A = 0;
    TCCR1B = 0;
    TCCR1B |= (1 << CS11) | (1 << CS10); // atur prescaler ke-64
    interrupts();

    attachInterrupt(digitalPinToInterrupt(ZCD_Pin), ZCD, CHANGE);
}

```

```

void ZCD()
{
    if(fr)
    {
        if(digitalRead(ZCD_Pin))
        {
            ZCD_Cycle = 0; //ZCD berada pada siklus positif
        }
        else
        {
            ZCD_Cycle = 1; // ZCD berada pada siklus negatif
        }
    }

    OCR1A = alpha;
    TCNT1 = 0; // mengatur timer dimulai dari 0
    TIMSK1 |= (1 << OCIE1A); // aktifkan timer A

    digitalWrite(conv_Pin[conv_Type], HIGH);
}

else
{
    digitalWrite(conv_Pin[conv_Type], LOW);
    freq_Cycle = 0;
}
}

ISR (TIMER1_COMPA_vect)
{
    TIMSK1 &= (0 << OCIE1A); // non-aktifkan timer A

    digitalWrite(scr_Pin[conv_Type][ZCD_Cycle], HIGH);
    delayMicroseconds(50);
    digitalWrite(scr_Pin[conv_Type][ZCD_Cycle], LOW);

    freq_Cycle = freq_Cycle + 1;

    if(freq_Cycle >= freq)
    {

```

```

digitalWrite(conv_Pin[conv_Type], LOW);
conv_Type = !conv_Type;
freq_Cycle = 0;
}

}

void loop()
{
while (Serial.available())
{
dt_Char = Serial.read();
data += dt_Char;

if(dt_Char == '@')
{
if(data.length() == 9 && data[0] == '#')
{
dt_Freq = data[1] - '0';
dt_Fr = data[3] - '0';
dt_Alpha = 0;
for (int n = 0; n < 3; n++)
{
arr_dt_Alpha[n] = data[n+5] - '0';
dt_Alpha = dt_Alpha + arr_dt_Alpha[n] * pow(10,(2-n));
}
dt_Alpha = map(dt_Alpha, 0, 180, 0, 2500);
data = "";
}
else
{
data = "";
}
}

if(dt_Freq != freq || dt_Fr != fr || dt_Alpha != alpha)
{
noInterrupts();
freq = dt_Freq;
}
}

```

```
fr = dt_Fr;  
alpha = dt_Alpha;  
interrupts();  
}  
}
```